


H41<sup>H</sup>W-16C/P/R<sub>Y</sub>

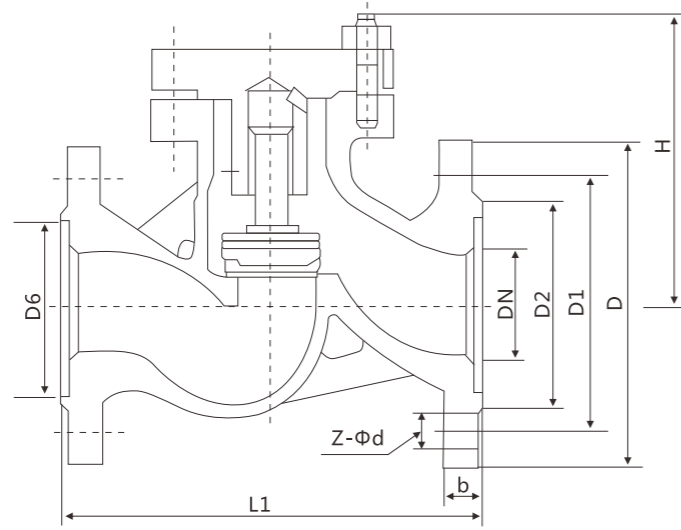

**标准**

设计与制造按GB/T12235  
 结构长度按GB/T12221  
 法兰连接尺寸按JB/T79  
 检验按JB/T9092

**试验压力**

试验项目		壳体试验		密封试验		上密封试验		气密封试验	
介质		水						气 Air	
单位		MPa		MPa		MPa		MPa	
公称压力	1.6	2.4	1.8	1.8	1.8	1.8	0.5~0.7		
	2.5	3.8	2.8	2.8	2.8	2.8			
	4.0	6.0	4.4	4.4	4.4	4.4			
	6.4	9.6	7.0	7.0	7.0	7.0			
	10.0	15.0	11.0	11.0	11.0	11.0			
	16.0	24.0	18.0	18.0	18.0	18.0			

**主要零件材料**

名称	材料								
阀体/阀盖	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
阀瓣	CF8	CF3	CF8M	CF3M	WCB	LCB	WC6	WC9	C5
垫片	PTFF				石墨 Graphite				
螺栓	不锈钢				35CrMoA				
螺母	不锈钢				45、35CrMoA				

**主要连接尺寸**

型号	公称口径	尺寸									
		L	D	D1	D2	D6	b-f	f1	z-Φd	H	
H41 <sup>H</sup> W-16 <sub>Y</sub>	15	130	95	65	45		14-2		4-Φ14	90	
	20	150	105	75	55		14-2		4-Φ14	105	
	25	160	115	85	65		14-2		4-Φ14	115	
	32	180	135	100	78		16-2		4-Φ18	120	
	40	200	145	110	85		16-3		4-Φ18	130	
	50	230	160	125	100		16-3		4-Φ18	140	
	65	290	180	145	120		18-3		4-Φ18	150	
	80	310	195	160	135		20-3		8-Φ18	170	
	100	350	215	180	155		20-3		8-Φ18	185	
	125	400	245	210	185		22-3		8-Φ18	195	
	150	480	280	240	210		24-3		8-Φ23	225	
	200	600	335	295	265		26-3		12-Φ23	250	
	250	650	405	355	320		30-3		12-Φ25	270	
H41 <sup>H</sup> W-25 <sub>Y</sub>	15	130	95	65	45		16-2		4-Φ14	90	
	20	150	105	75	55		16-2		4-Φ14	105	
	25	160	115	85	65		16-2		4-Φ14	115	
	32	180	135	100	78		18-2		4-Φ18	120	
	40	200	145	110	85		18-3		4-Φ18	130	
	50	230	160	125	100		20-3		4-Φ18	140	
	65	290	180	145	120		22-3		8-Φ18	150	
	80	310	195	160	135		22-3		8-Φ18	170	
	100	350	230	190	160		24-3		8-Φ23	185	
	125	400	270	220	188		28-3		8-Φ25	195	
	150	480	300	250	218		30-3		8-Φ25	225	
	200	600	360	310	278		34-3		12-Φ25	250	
	250	650	425	370	335		36-3		12-Φ30	270	
H41 <sup>H</sup> W-40 <sub>Y</sub>	25	160	115	85	65	58	16-2	4	4-Φ14	115	
	32	180	135	100	78	66	18-2	4	4-Φ18	120	
	40	200	145	110	85	76	18-3	4	4-Φ18	130	
	50	230	160	125	100	88	20-3	4	4-Φ18	140	
	65	290	180	145	120	110	22-3	4	8-Φ18	150	
	80	310	195	160	135	121	22-3	4	8-Φ18	170	
	100	350	230	190	160	150	24-3	4.5	8-Φ23	185	
	125	400	270	220	188	176	28-3	4.5	8-Φ25	195	
	150	480	300	250	218	204	30-3	4.5	8-Φ25	225	
	200	600	375	320	282	260	38-3	4.5	12-Φ30	250	
	H41 <sup>H</sup> W-64 <sub>Y</sub>	15	170	105	75	55	40	18-2	4	4-Φ14	110
		20	190	125	90	68	51	20-2	4	4-Φ18	125
		25	210	135	100	78	58	22-2	4	4-Φ18	152
32		230	150	110	82	66	24-2	4	4-Φ23	168	
40		260	165	125	95	76	24-3	4	4-Φ23	170	
50		300	175	135	105	88	26-3	4	4-Φ23	188	
65		340	200	160	130	110	28-3	4	8-Φ23	205	
80		380	210	170	140	121	30-3	4	8-Φ23	230	
100		430	250	200	168	150	32-3	4.5	8-Φ25	280	
125		500	295	240	202	176	36-3	4.5	8-Φ30	300	
150		550	340	280	240	204	38-3	4.5	8-Φ34	350	
200		650	405	345	300	260	44-3	4.5	12-Φ34	400	